

3" Hi-Power Coaxial Cable Sets for Nuclear & Hi-Energy use

11KW CW @700MHz, 16KW CW @ 350MHz, uses High Quality 3-1/8" Connectors

3-1/8 inch RF Cable Sets from us have been designed for EXTREMELY HIGH POWER RF transmission in frequencies upto 1500 MHz. Intended for hi-energy applications in nuclear, particle physics and similar applications


Power Handling

11KW CW @ 700 MHz
16KW CW @ 350 MHz

available on rupee payment

APPLICATIONS

- Nuclear applications
- Particle Physics research applications
- Any application that needs extremely high power RF coaxial cables

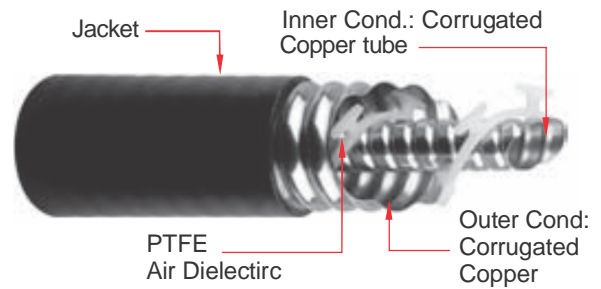

Electrical Specifications	
Impedance	50 ± 0.5 Ω
Relative velocity of propagation	96%
Capacitance pF/m (pF/ft)	70.0 (21.3)
Inductance uH/m (uH/ft)	0.175 (0.053)
Max. Operating frequency	1.5 GHz
Peak power rating	580 KW
RF peak voltage	7600 Volts
Jacket Spark	8000 Volts RMS
Inner conductor DC-resistance	0.51 Ω/1000 m
Outer conductor DC-resistance	0.18Ω/1000 m

Mechanical Specifications	
Cable weight	2.6 kg/m
Tensile Strength	1800 N
Min. bending radius (single)	270 mm
Min. bending radius (repeated)	800 mm
Recommended/Max. clamp spacing	0.8/1.2 m

Description	Material
Inner Conductor	Corrugated Copper Ø 27.1 mm
Dielectric	Air type dielectric, Ø 58.4 mm
Outer Conductor	Corrugated Copper, Ø 66.6 mm
Jacket	Ø 71 mm

Attenuation and Power Handling Data													
Frequency [MHz]	100	200	300	400	450	500	600	700	800	900	1000	1250	1500
Attenuation [dB/100m]	0.44	0.63	0.78	0.90	0.96	1.02	1.12	1.22	1.31	1.39	1.47	1.66	1.83
Average power [kW]	36.0	25.3	20.6	17.8	16.8	15.9	14.5	13.4	12.6	11.8	11.2	10.1	9.19

Shown trademarks are property of their respective owners.

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.

3" Hi-Power Coaxial Cable Sets for Nuclear & Hi-Energy use

11KW CW @700MHz, 16KW CW @ 350MHz, uses High Quality 3-1/8" Connectors

Ordering Codes Description

3l - □ □ - □ (□ / □) - □ (□ / □) - □
L L 1 2 3 1 2 3 U

L L	Length	0.5 = 0.5 ; 1 = 1.0 ; 2 = 2.0
1	Connector Series	EIA 3-1/8 = 3-1/8
2	Male/Female Designator	M = Male ; F = Female
3	Orientation of Connector	ST = Straight ; RA = Right Angle
U	Unit of Length	M = Meter ; F = Feet ; I = Inch

1 meter cable set with 3-1/8 on both sides = 3l-1.0-3-1/8(M/ST)-3-1/8(M/ST)-M

Cable Set Ordering Codes

Part Number	Conn 1	Conn 2	Length
3-1/8 (Male) Straight Connector on one end & 3-1/8 (Male) Straight Connector on other end			
3l-1.0-3-1/8(M/ST)-3-1/8(M/ST)-M	3-1/8 EIA	3-1/8 EIA	1m
3l-2.0-3-1/8(M/ST)-3-1/8(M/ST)-M	3-1/8 EIA	3-1/8 EIA	2m
3l-5.0-3-1/8(M/ST)-3-1/8(M/ST)-M	3-1/8 EIA	3-1/8 EIA	5m
3l-10.0-3-1/8(M/ST)-3-1/8(M/ST)-M	3-1/8 EIA	3-1/8 EIA	10m
3l-30.0-3-1/8(M/ST)-3-1/8(M/ST)-M	3-1/8 EIA	3-1/8 EIA	30m
3l-50.0-3-1/8(M/ST)-3-1/8(M/ST)-M	3-1/8 EIA	3-1/8 EIA	50m

3-1/8" Connector Specifications

3-18" EIA Flange



Specifications	3-1/8" Connectors
Center Conductor	Silver Plated
Attachment Method (inner)	Threaded
Attachment Method (outer)	Tab Flare
Nominal Impedance	50 Ω
Frequency range	DC ~ 1.5 Ghz
Standards	EIA RS-225, MIL-F-24044

Shown trademarks are property of their respective owners.

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.

