

Replace traditional 'RG' types for benefit of:

- lower loss
- better shielding > - 90dB

Drop in replacement for:

- RG58 • RG223

LL58 series cable sets are designed as superior alternative to RG58, RG223 types. Usable upto 3.5 GHz with a wide choice of connectors like SMA, N, BNC, TNC and in various styles like straight, right angle and panel mounts.



- **Superior replacement for RG58, RG223,** LL58 cable sets are drop-in replacement for RG58, RG223 with similar mechanical sizes.
- **RF Shielding** is 90 dB. This is 30dB higher than 60dB (typical) for single shielded RG types.

- **Low Loss :** Loss is 30% less than comparable size RG cables.
- **Flexibility:** LL58 types are highly flexible and can be routed easily. They have the highest bend radius available for any cable of similar size and performance.

**APPLICATIONS**

- Superior replacement of conventional RG58, RG223 types
- Satcom, IF, Military Jamming and Military Communications

**Electrical Specifications**

Impedance	50 Ω
Frequency Range	DC ~ 3.5 GHz
Velocity of Propagation	80 %
Capacitance	83.3 pF/m
Shielding Effectiveness	> 90 dB
Working Voltage	1 kV (DC)
Operating Temperature	-40°C to +85°C

**Mechanical Specifications**

Inner Conductor	Copper
Dielectric	PE, Foamed
Outer Conductor	Aluminium Tape
Braid	Tinned Cooper
Jacket	Black PE, 5mm dia.
Bend Radius: installation	12.7mm
Bend Radius: multiple	50mm
Weight	0.03 kg/m


**Attenuation & Power Handling Data**

Frequency (GHz)	0.10	0.20	0.40	0.9	1.5	2	3
Attenuation (dB/m)	0.12	0.17	0.25	0.37	0.49	0.57	0.70
Average Power (W)	480	337	236	156	120	104	84


Shown trademarks are property of their respective owners. While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.

Lower Loss Replacement for RG58/223/400

Return Loss of 1.5m. LL58 Cable Set with N(M) on both sides

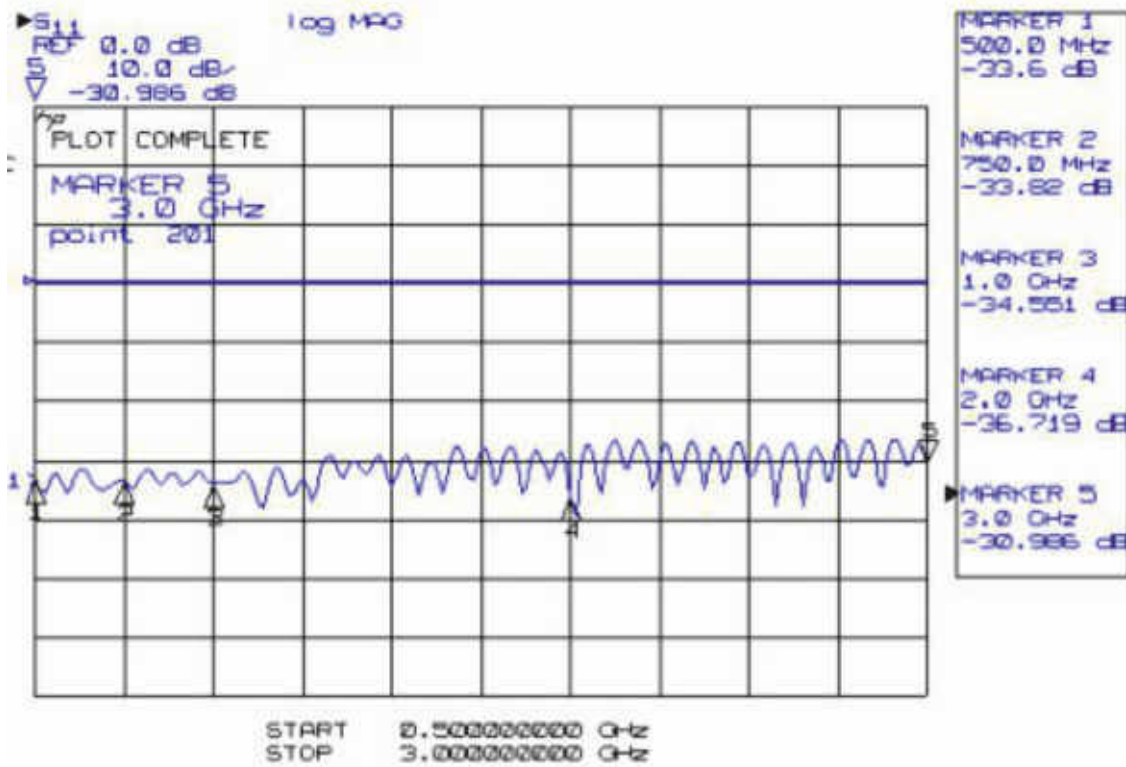


Insertion Loss of 1.5m, LL58 Cable Set with N(M) on both sides

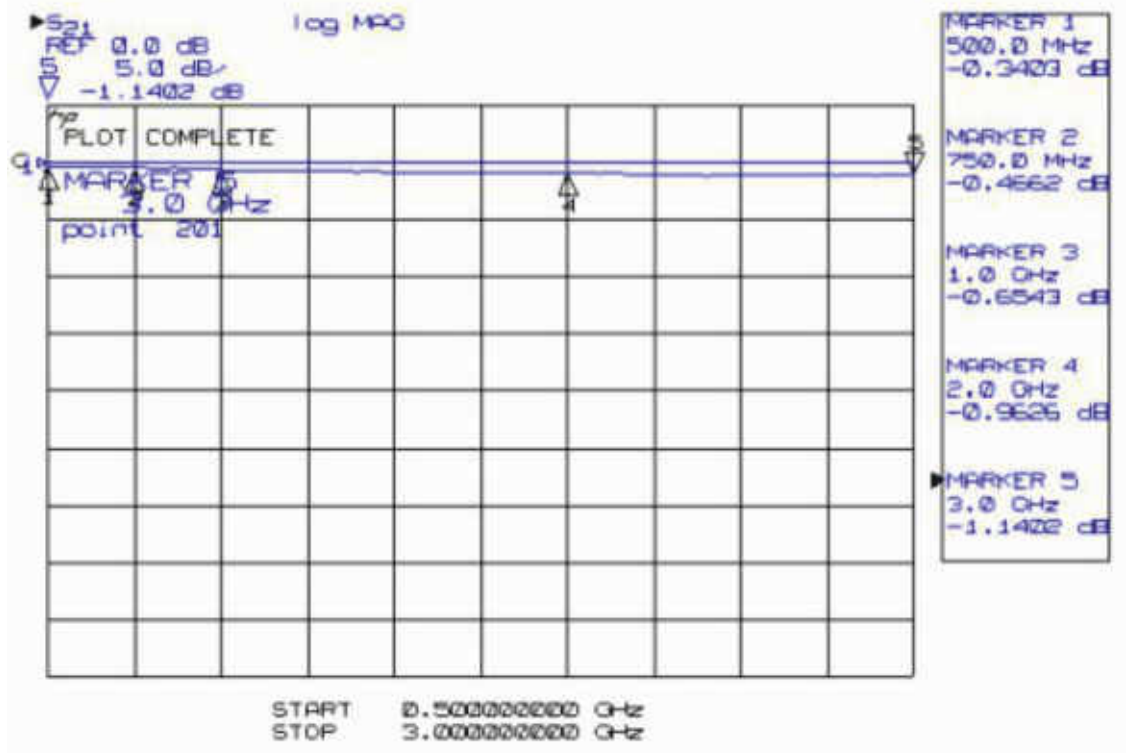

Shown trademarks are property of their respective owners.

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.

### CABLE CONSTRUCTION

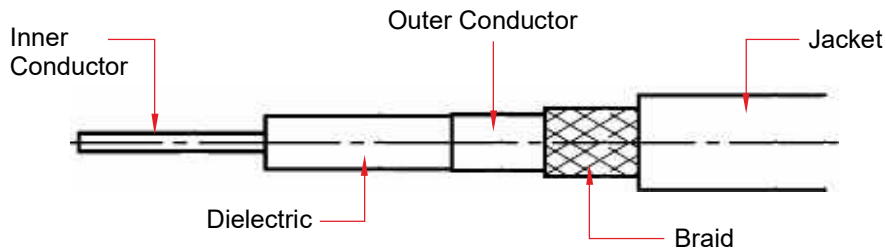

### Connectors Specifications

Specifications	SMA Connectors	N Connectors	TNC Connectors
Outer Conductor	Brass, Gold Plated	Brass, Nickel alloy plated	Brass, Nickel alloy plated
Center Conductor	Brass, Gold Plated	Brass, Gold Plated	Brass, Gold Plated
Insulation	PTFE	PTFE	PTFE
Gasket	Silicon Rubber	Silicon Rubber	Silicon Rubber
Nominal Impedance	50 Ω	50 Ω	50 Ω
Frequency range	DC~6 GHz	DC~6 GHz	DC~6 GHz
Mating/Unmating	500 operations	500 operations	500 operations

### Ordering Codes Description

LL58 - (Length) - (Connector 1) - (Connector 2)  
**L L** - **1 2 3** - **1 2 3 U**

<b>LL</b>	Length	0.5 = 0.5 ; 1 = 1.0 ; 2 = 2.0
<b>1</b>	Connector Series	SMA = SMA ; N = N ; BNC = BNC ; TNC = TNC
<b>2</b>	Male/Female Designator	M = Male ; F = Female
<b>3</b>	Orientation of Connector	ST = Straight ; RA = Right Angle
<b>U</b>	Unit of Length	M = Meter ; F = Feet ; I = Inch

1 meter cable set with SMA (Male) on both sides = LL58-1.0-SMA(M/ST)-SMA(M/ST)-M

Shown trademarks are property of their respective owners.

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.

Cable Set Ordering Codes

Ordering Code	Length	Insertion Loss (dB) Typical			
		400 MHZ	1 GHz	1.5 GHz	3 GHz
<b>SMA (Male) Straight - SMA (Male) Straight</b>					
LL58-0.5-SMA(M/ST)-SMA(M/ST)-M	0.5m	0.19	0.29	0.36	0.50
LL58-1.0-SMA(M/ST)-SMA(M/ST)-M	1m	0.32	0.48	0.60	0.81
LL58-2.0-SMA(M/ST)-SMA(M/ST)-M	2m	0.55	0.85	1.08	1.47
LL58-5.0-SMA(M/ST)-SMA(M/ST)-M	5m	1.24	1.95	2.51	3.43
LL58-1.0-SMA(M/ST)-SMA(M/ST)-F	1 feet	0.16	0.21	0.27	0.35
LL58-2.0-SMA(M/ST)-SMA(M/ST)-F	2 feet	0.22	0.33	0.41	0.55
<b>N (Male) Straight - N (Male) Straight</b>					
LL58-0.5-N(M/ST)-N(M/ST)-M	0.5m	0.25	0.31	0.38	0.50
LL58-1.0-N(M/ST)-N(M/ST)-M	1m	0.34	0.50	0.62	0.83
LL58-2.0-N(M/ST)-N(M/ST)-M	2m	0.57	0.87	1.10	1.49
LL58-5.0-N(M/ST)-N(M/ST)-M	5m	1.26	1.97	2.53	3.45
LL58-1.0-N(M/ST)-N(M/ST)-F	1 feet	0.18	0.23	0.29	0.37
LL58-2.0-N(M/ST)-N(M/ST)-F	2 feet	0.24	0.35	0.43	0.57
<b>TNC (Male) Straight - TNC (Male) Straight</b>					
LL58-0.5-TNC(M/ST)-TNC(M/ST)-M	0.5m	0.22	0.32	0.39	0.51
LL58-1.0-TNC(M/ST)-TNC(M/ST)-M	1m	0.34	0.51	0.63	0.84
LL58-2.0-TNC(M/ST)-TNC(M/ST)-M	2m	0.58	0.88	1.11	1.50
LL58-5.0-TNC(M/ST)-TNC(M/ST)-M	5m	1.27	1.98	2.54	3.46
LL58-1.0-TNC(M/ST)-TNC(M/ST)-F	1 feet	0.19	0.24	0.30	0.38
LL58-2.0-TNC(M/ST)-TNC(M/ST)-F	2 feet	0.25	0.36	0.43	0.58
<b>BNC (Male) Straight - BNC (Male) Straight</b>					
LL58-0.5-BNC(M/ST)-BNC(M/ST)-M	0.5m	0.23	0.33	0.40	0.52
LL58-1.0-BNC(M/ST)-BNC(M/ST)-M	1m	0.36	0.52	0.64	0.85
LL58-2.0-BNC(M/ST)-BNC(M/ST)-M	2m	0.59	0.89	1.12	1.51
LL58-5.0-BNC(M/ST)-BNC(M/ST)-M	5m	1.28	1.99	2.55	3.47
LL58-1.0-BNC(M/ST)-BNC(M/ST)-F	1 feet	0.20	0.25	0.31	0.39
LL58-2.0-BNC(M/ST)-BNC(M/ST)-F	2 feet	0.26	0.37	0.45	0.59
<b>SMA (Male) Straight - SMA (Male) Right Angle</b>					
LL58-0.5-SMA(M/ST)-SMA(M/RA)-M	0.5m	0.25	0.35	0.42	-
LL58-1.0-SMA(M/ST)-SMA(M/RA)-M	1m	0.38	0.54	0.66	-
LL58-2.0-SMA(M/ST)-SMA(M/RA)-M	2m	0.61	0.91	1.14	-
LL58-5.0-SMA(M/ST)-SMA(M/RA)-M	5m	1.30	2.01	2.57	-
LL58-1.0-SMA(M/ST)-SMA(M/RA)-F	1 feet	0.22	0.27	0.33	-
LL58-2.0-SMA(M/ST)-SMA(M/RA)-F	2 feet	0.28	0.39	0.47	-

Shown trademarks are property of their respective owners.

While the information contained herein in this catalog, has been carefully compiled to the best of our knowledge, nothing is intended as representation and warranty on our part; and no statement shall be construed as recommendation to infringe any of existing patents. We accept no liability of whatsoever for any faults and errors in the information contained herein. Contents of this catalogue and specifications of the products, are subject to change without notice due to continuous improvements.

